



DT-T90

SnapLab⁺

Installation and Quick Start Guide

Summary

For more details, please visit www.dnpphoto.eu website
to download the Photo Editing Software User Guide.

Summary	2
Warning <i>Chapter 1</i>	3
Warning on power connection	3
For the customers in Europe	3
Installation <i>Chapter 2</i>	4
Box content	4
Quick Start <i>Chapter 3</i>	5
Installation/connexion of dongles	5
Starting DT-T90	5
Change of software language by default	6
Direct Wifi connection	7
Make a print order	11
Shutdown the DT-T90	14
Connection to Team Viewer for support intervention	15
Troubleshooting	16

Warning

Chapter 1

To reduce the risk of fire or electric shock, do not expose this equipment to rain or moisture.

To avoid electrical shock, do not open the DT-90 and DS-Printer covers. Refer servicing to qualified staff only.

THIS EQUIPMENT MUST BE EARTHED.

To disconnect the main power, unplug the AC IN connector.

Warning on power connection

Use a proper power cord for your local power supply.

1. Use the approved Power Cord (3-core mains lead) / Appliance Connector / Plug with earthing-contacts that conforms to the safety regulations of each country if applicable.
2. Use the Power Cord (3-core mains lead) / Appliance Connector / Plug conforming to the proper ratings (Voltage, Ampere).

For the customers in Europe

This product shall not be used in the residential area.

This is a Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

This equipment is compliant with Class A of CISPR 32. If you want to dispose this product, do not mix with general household waste.

There is a separate collection system for used electronics products in accordance with legislation under the WEEE Directive and is effective only within European Union. For details, consult your dealer.





Installation

Chapter 2

Box content

The box contents:

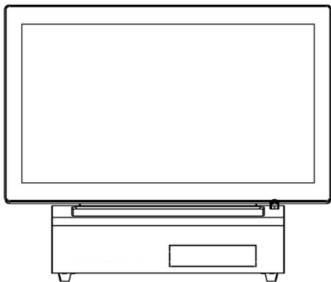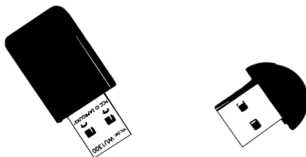
 DT-T90	 Power cord
 USB cable certified USB 2.0 male A to male B printer cable	 1 dongle Wifi & 1 dongle bluetooth
(This document) Explanation booklet	

Quick Start

Chapter 3

Installation/connexion of dongles


- 1) Plug Wifi & Bluetooth dongles on the back of the terminal:

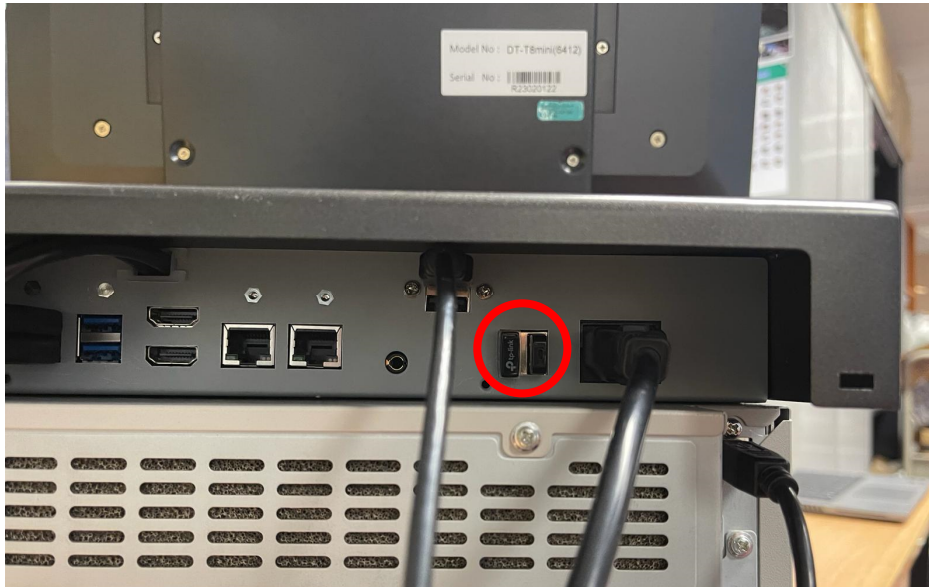

- 2) Make sure all power supply cables (DS620 printer & DT-T90) are connected.
- 3) connect DS620 printer to DT-T90 with USB cable.

Starting DT-T90

- 1) Switch on DS620 printer.
- 2) Load media into the printer (please refer to dedicated printer Start-up Guide).
- 3) Switch on the DT-T90 on the back side.

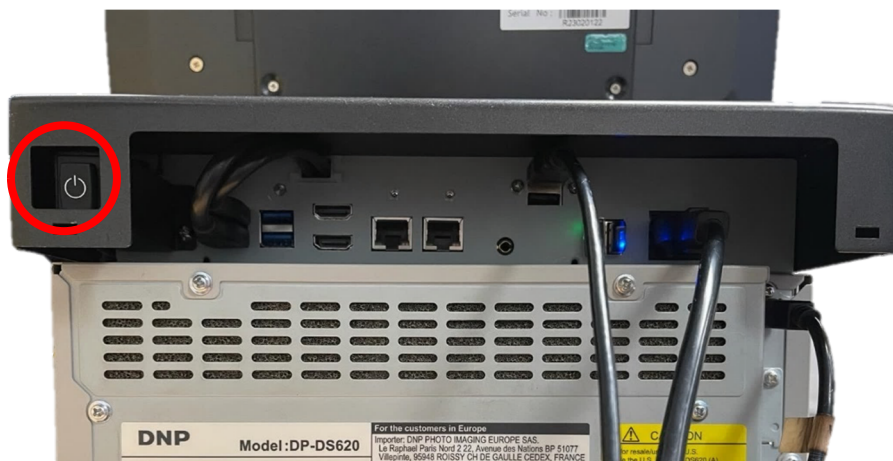

- ➔ After a few minutes the Photo Editing Software will automatically start running. The software will display only products that can be printed with connected printer and loaded media.



Note: If the printer is not connected, the software will display the following message:

No product is configured or available. Check the configuration to create a product, or verify that the printers are properly connected to the system.

continue


- ➔ When the printer is connected to the system, the above message will disappear automatically within a few seconds and then the software will display the products window as per the connected printer.

Change of software language by default


- 1) Enter into Main Panel by touching in sequence the lower left and right corners of the monitor.



- 2) Click on **settings** button.

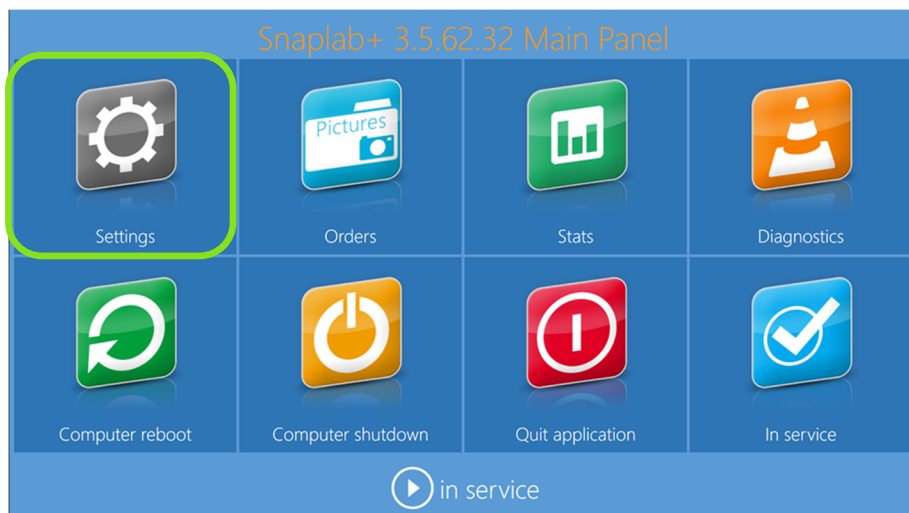

- 3) Choose “Settings” > “Language”.

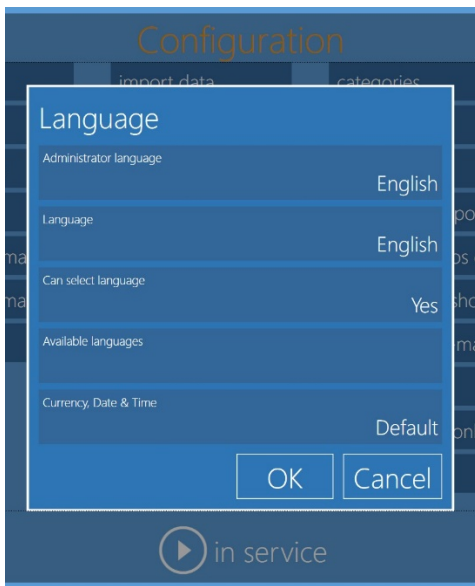

Available Languages	
Czech	Japanese
English	Polish
Finnish	Portuguese
French	Romanian
German	Russian
Greek	Spanish
Hungarian	Ukrainian
Italian	

- **Available languages:** The Photo Editing Software both editing & admin settings are available from the above list of languages.

- **Administrator Language:** select language to be used as default language for settings. You need to restart the software to have new language in operation.
- **Language:** select language to be used for user workflow.
- **Select language:** if set to yes, user will be able to choose workflow language from the selection set with “Available languages” button.


Direct Wifi connection

This is the workflow to get Direct Wifi connection for photo transfer from your smartphone device.

- 1) Enter into Main Panel by touching in sequence the lower left and right corners of the monitor.




2) Click on **settings** button.

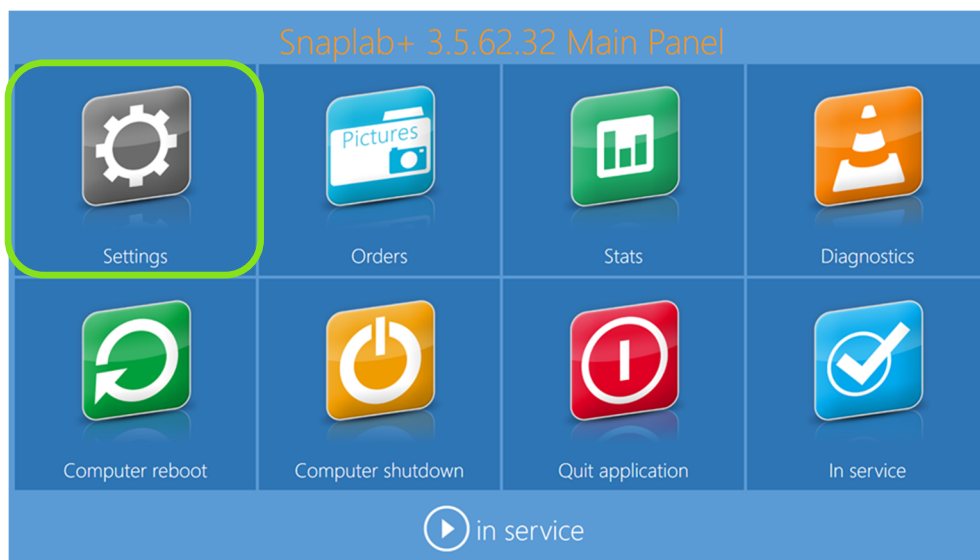

3) Click on **photo sources** button.




- 4) Click on **Wi-Fi connection type** button: select Normal & press “OK”.

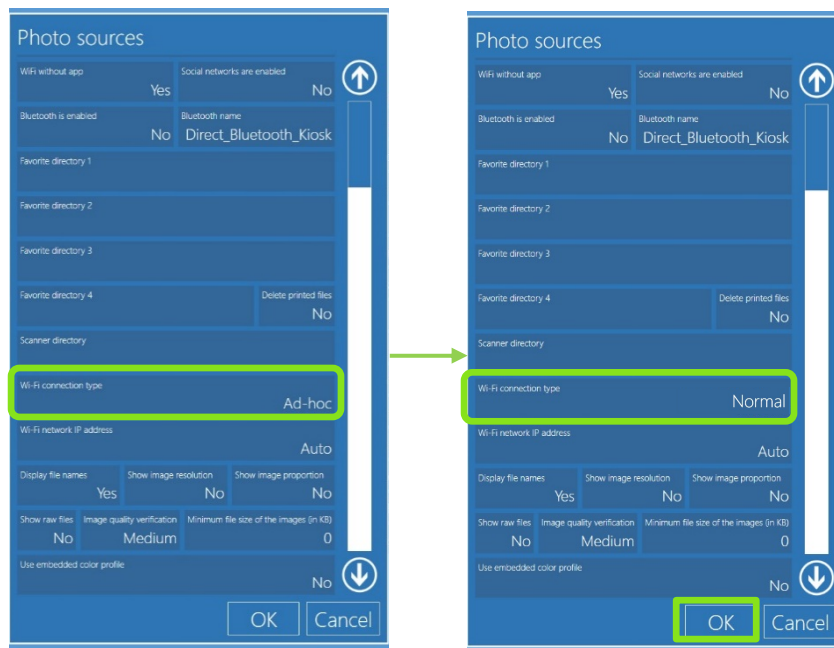

- 5) Click again on **photo sources** button.



6) Click on **Wi-Fi connection type** button: select Ad-hoc & press “OK”.

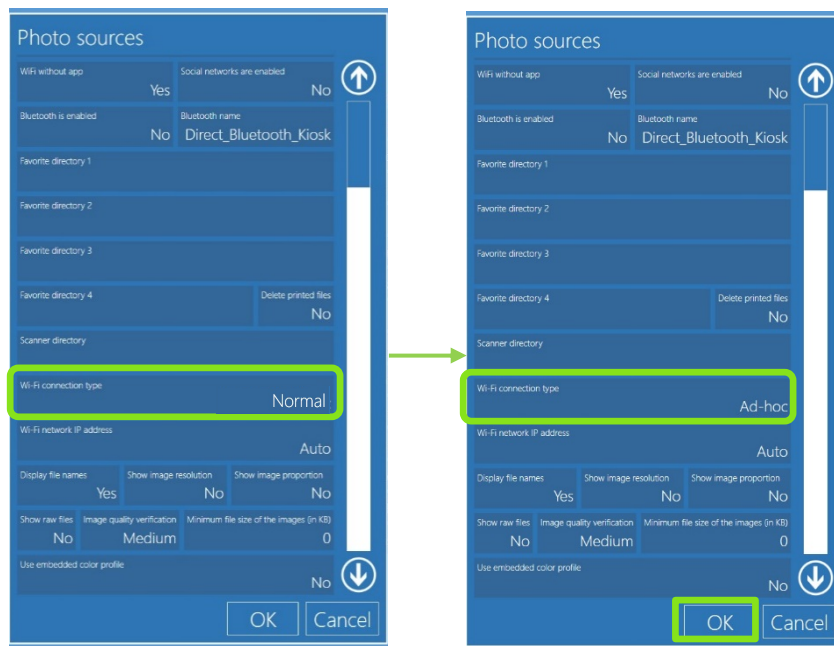



7) Once it is finalized, message appear, just click on “OK”.



Make a print order

This is the Workflow of creating and printing Single Sided Print product.


- 1) Select Prints.

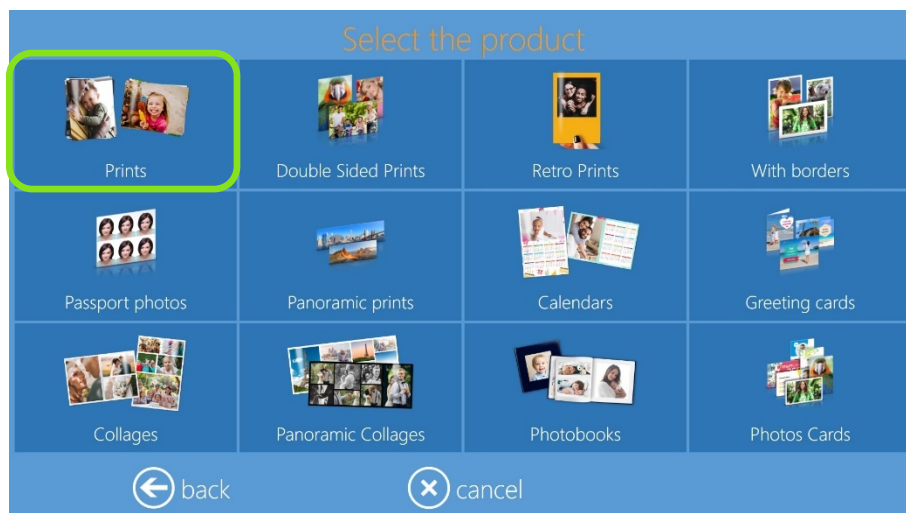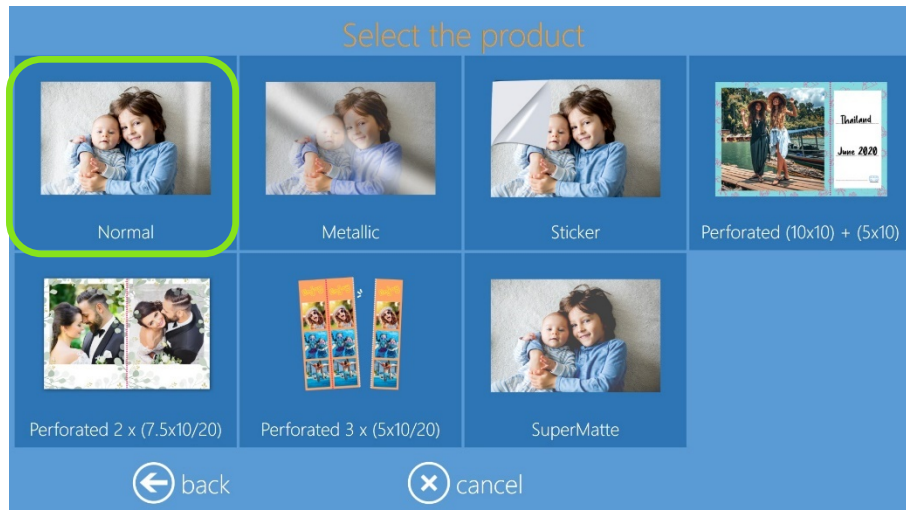


- 2) Select media where images are located, as an example a USB device with images.




- 3) Select images. By pressing “+” or “-” sign the print quantity can also be entered at this stage.

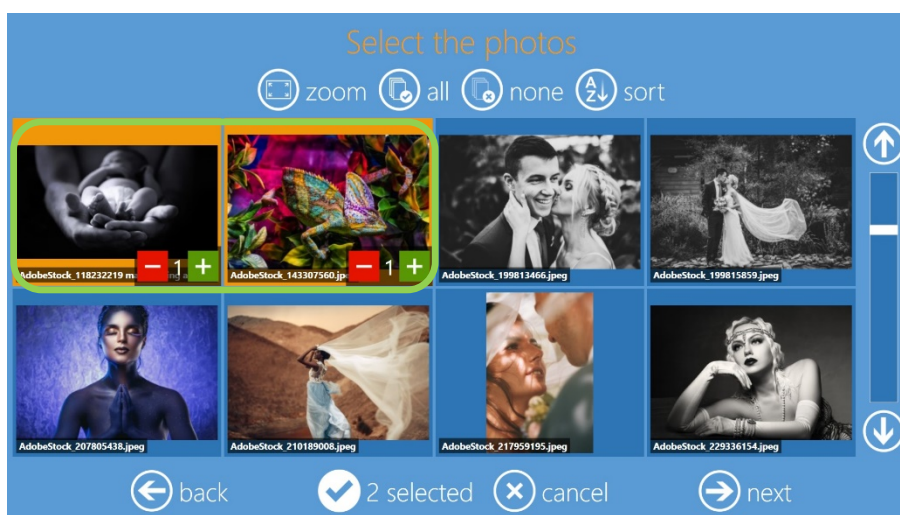


- 4) Select product and paper finish type.

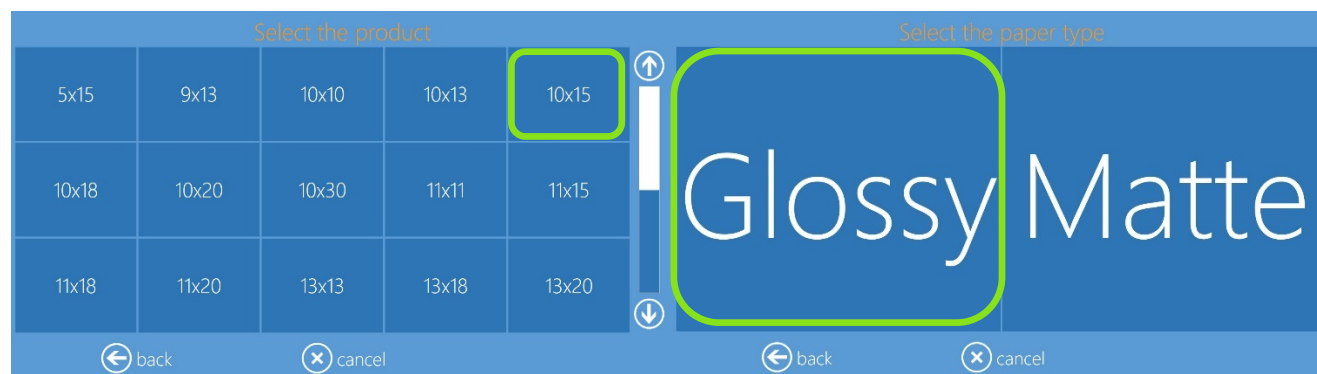


- 5) Edit print quantity, crop and enhance images, add text if needed.

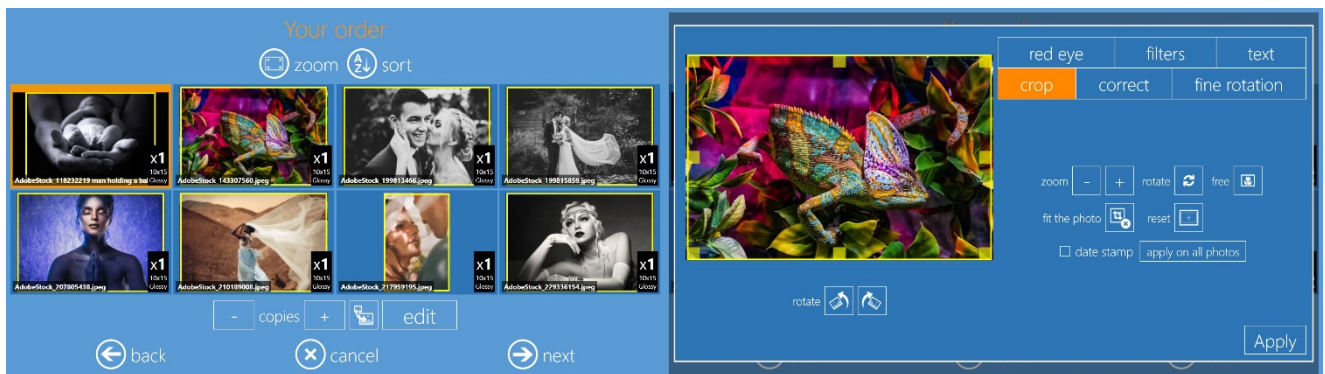

- 6) Order summary.

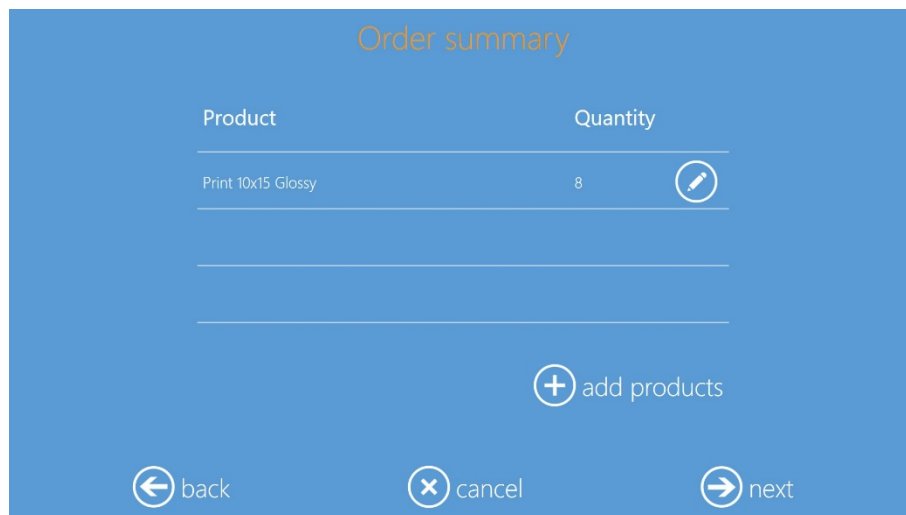


- 7) Insert Customer name.

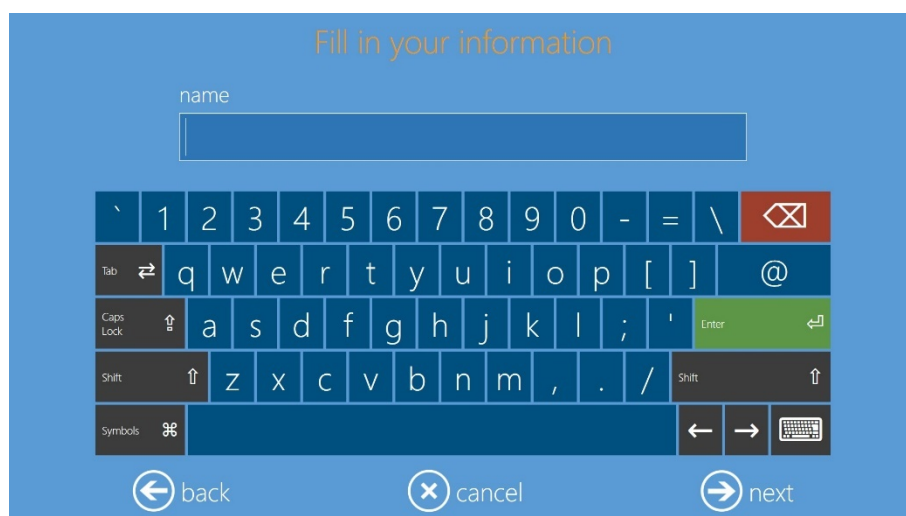


- 8) Press “next” to finish the order.

Shutdown the DT-T90

- 1) Enter into Main Panel by touching in sequence the lower left and right corners of the monitor.

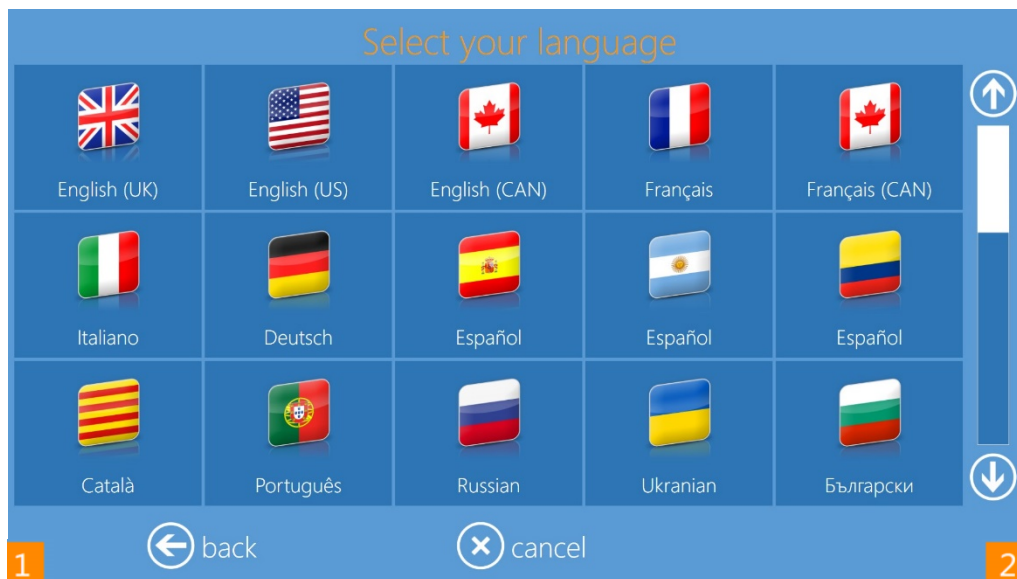


- 2) Click on **Computer shutdown** button.

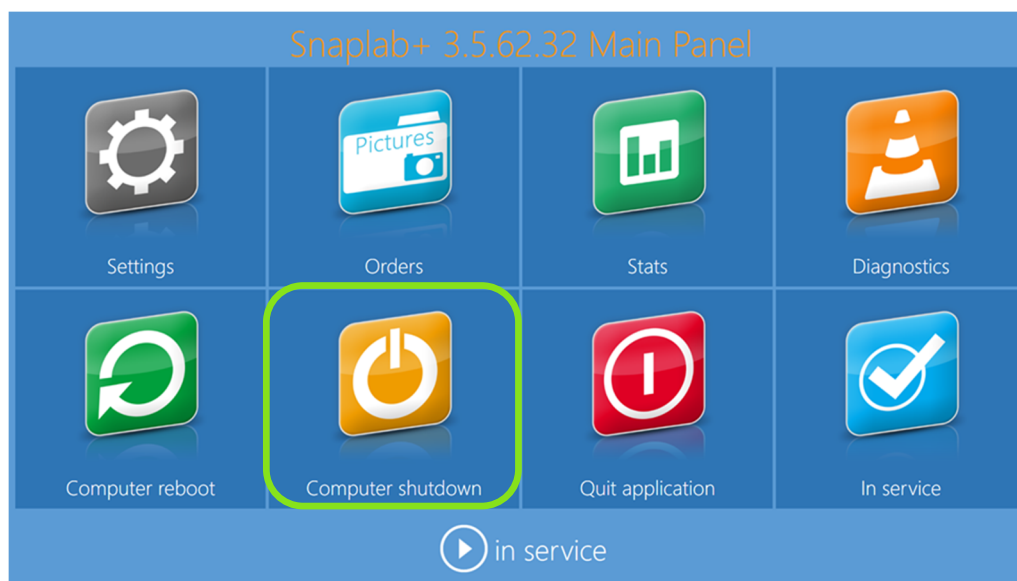


Connection to Team Viewer for support intervention

Team Viewer is already installed by default when you receive your order station.
Your order station must be connected to internet in order to launch Team Viewer:


- Either by connecting RJ45 cable from an internet source to DT-T90
- Or either by connecting to the Wifi network from the DT-T90:

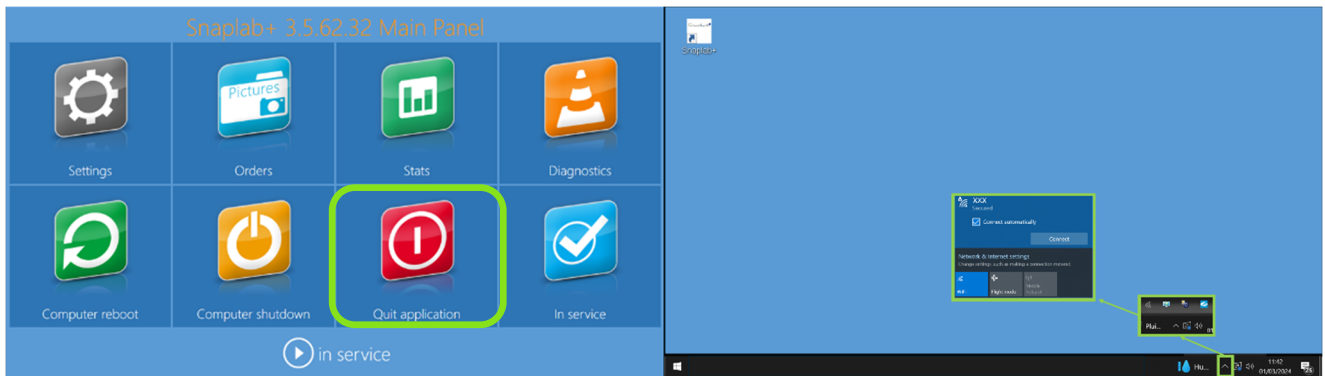


1. To connect to Team Viewer please go on the configuration menu & click on “Diagnostics”.

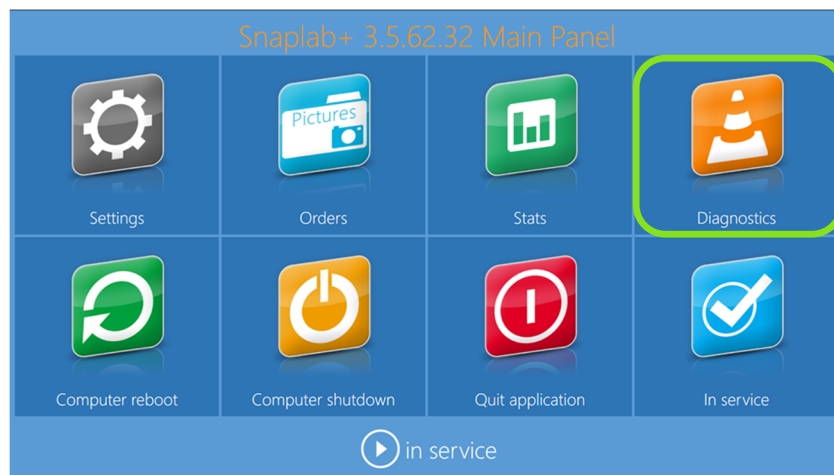

2. Click on “Teamviewer”.

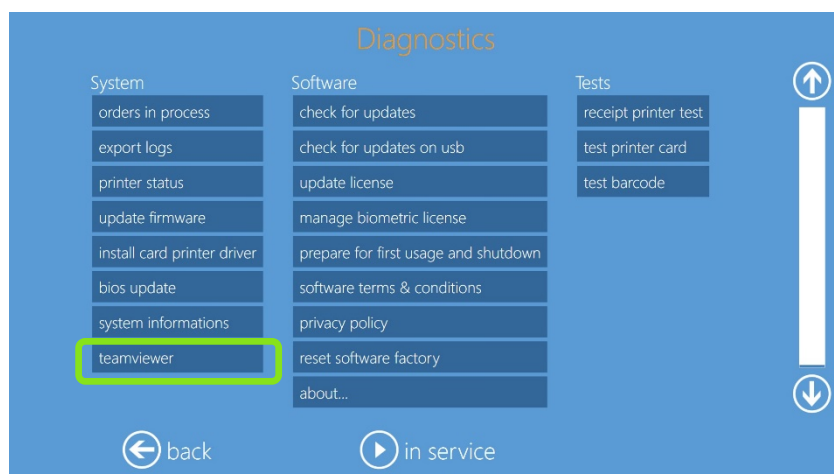

3. A pop-up will appear with an ID & password. Provide the ID to support contact then he will take control remotely of your order station.

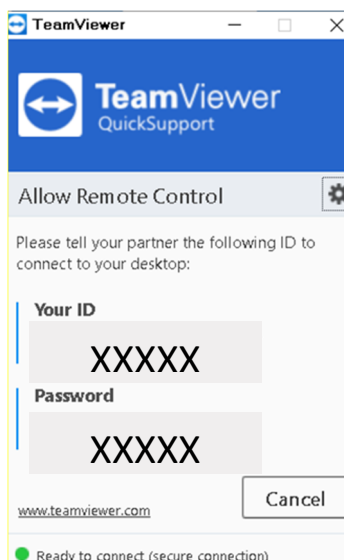

Troubleshooting

For any technical issue(s) and question(s), please contact DNP PIE support team at:

Support.pie@dnp-g.com

For more details, please visit www.dnpphoto.eu website
**to download Update Software and
the Photo Editing Software User Guide.**